
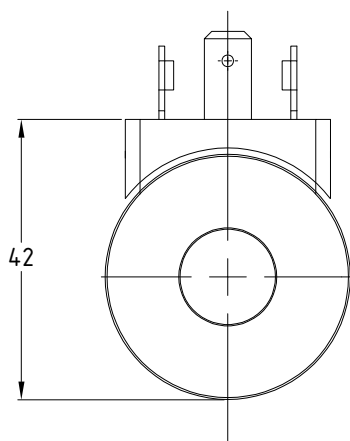
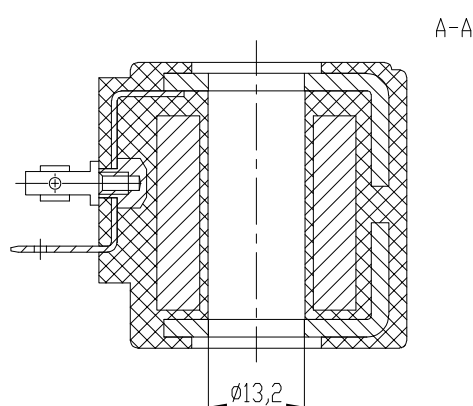


BESC20.5

Bobina per valvola ESC con armatura metallica esterna
Coil for electrical cartridge ESC with external metal cage

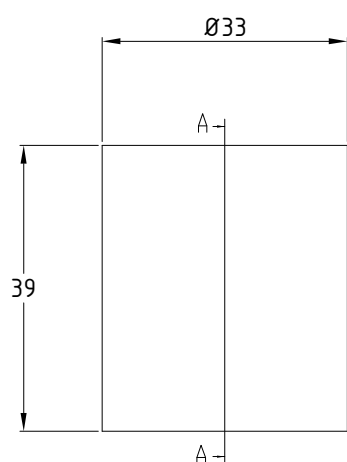

- Connessione tipo DIN-43650 (standard).
Altre connessioni a richiesta.
- Potenza/Power : 20,5 W
- ED : 100 %
- Tolleranza/Tolerance : +/-10% (DC),
+10% -5% (AC)
- Classe isolamento : H (180°)
- Temperatura ambiente/Ambient Temperature
range : -30°C, +60°C
- Peso/Weight : 0,19 Kg

Codice di ordinazione - Ordering code

B - ESC ** 20.5W

12DC = 12 Vdc	24DC = 24 Vdc
110AC = 110 Vac	220AC = 220 Vac