




MB 33 VL

Piastra mult. in ghisa per elettrovalvole cetop 03 con utilizzi A-B laterali, valvola di massima RV 30 e valvola a comando cavità SAE.

Manifold in cast iron for electrovalves Cetop 03 with A-B side ports, relief valve RV 30 and SAE cartridge valve 2 way 2 position

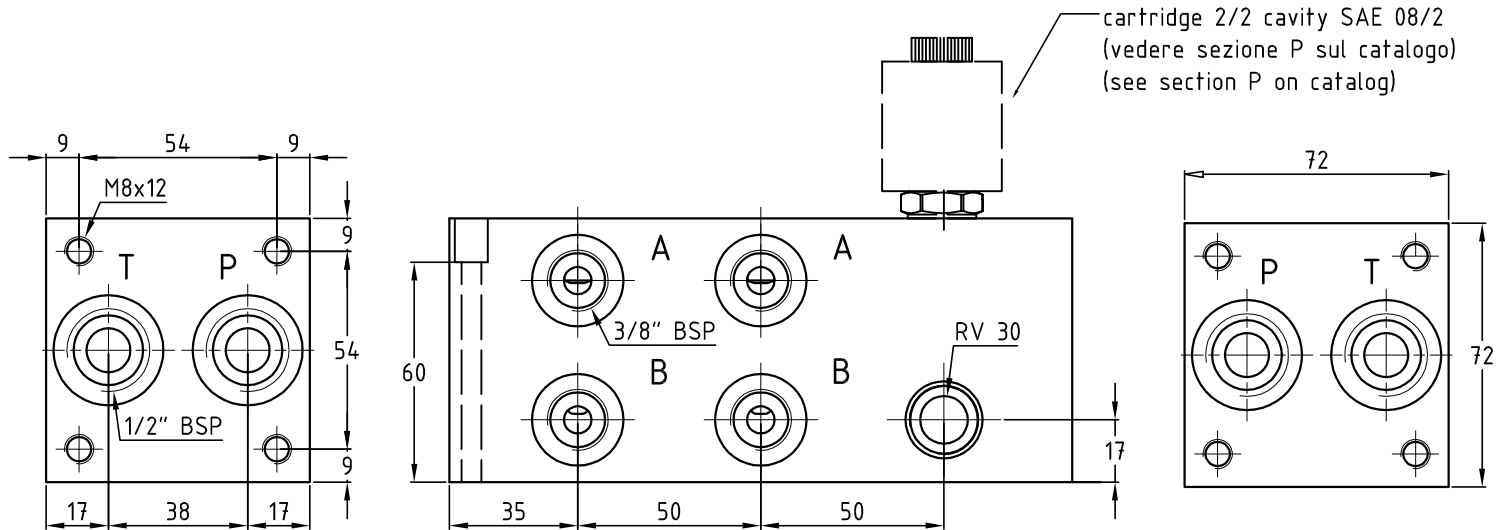

Schema idraulico con valvola NO
Hydraulic diagram with cartridge valve NO

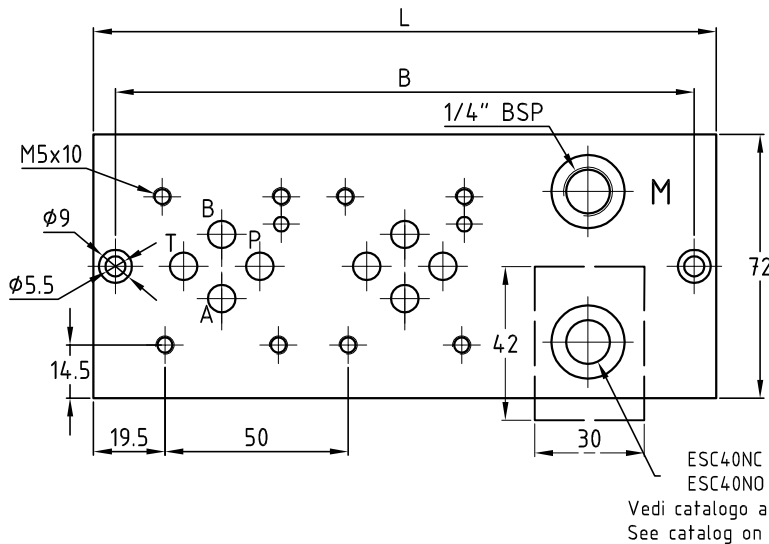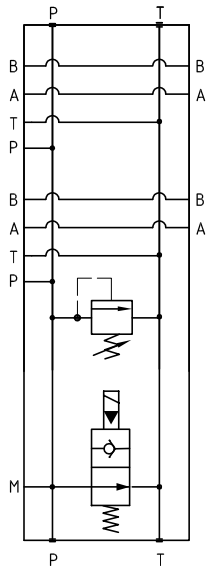

Dimension table

N° Stat.	L	B	Kg
1	120	108	1.3
2	170	158	2.0
3	220	208	2.7
4	270	258	3.4
5	320	308	4.1
6	370	358	4.8
7	420	408	5.5
8	470	458	6.2
9	520	508	6.9

Esempio di ordinazione - Ordering code

MB33 VL/ * S ** ** 2 *

Monoblocco in ghisa Cetop 03 con venting
Cast iron block Cetop 03 with venting

N° di posizioni
Stations number

S = attacchi A-B laterali
S = side ports A-B

Y=5÷55 bar A=25÷110 bar B=50÷250 bar
C=100÷350 bar D=100÷420 bar (page M02)

2 = con valvola di max. RV 30
2 = with relief valve RV 30

Vedere sezione P05 (See Section P05)
12=12VDC 24=24VDC 110=110VDC
220=220VDC

NC = Norm. chiusa NO = Norm. aperta
NC = Norm. close NO = Norm. open